


## Stoves & Spares Little Always, Wheatcroft Farm, Cullompton Devon, EX15 1RA UK

Tel: 01884 33559 Email S&S@woodwarm.co.uk or Web [www.woodwarm.co.uk](http://www.woodwarm.co.uk)

### Fitting A Baffle in Older Stoves

#### Replacement Baffle

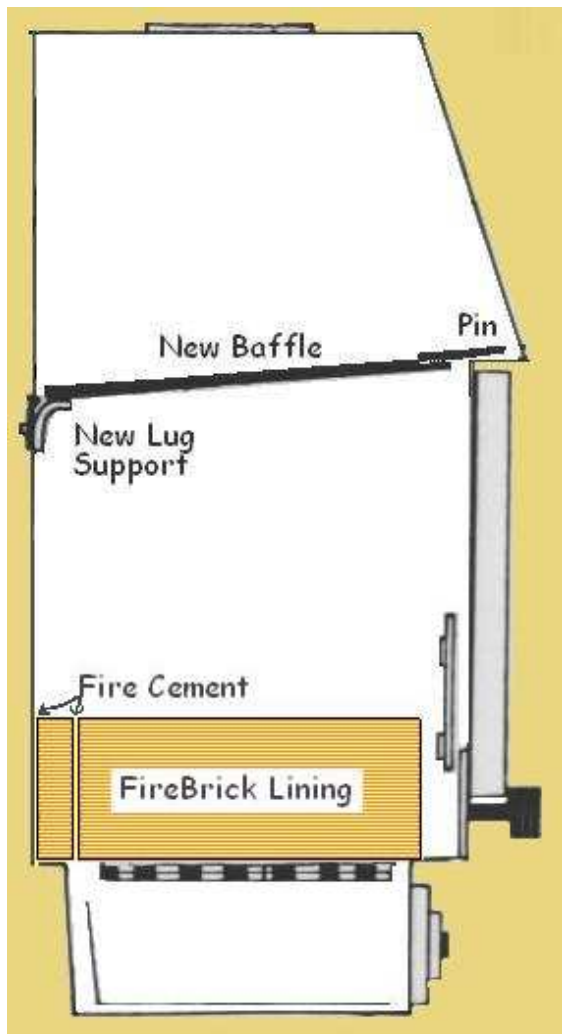

Remove the Old baffle plate,(throat Plate). This is secured at the rear of the Stove by two nuts (8mm 13mm Spanner). Undoing the nuts will reveal two circular holes of approximately 1 1/2" diameter. The new styled supporting lugs will be located in the centre of these holes.

The lugs are held in place by a large square plate which is designed to cover the hole in the stove rear wall. The bolt of the lug is secured through the plate with the nut and tightened ensuring that the lug points upwards inside the stove, to support the baffle. This operation is repeated for the other lug.

The Baffle will be held in place by the supporting lugs at the rear of the stove, and a small pin welded to the front top of the baffle plate.

To insert the baffle into the stove, the "V" must be pointing downwards. The welded pin should be facing the front of the stove and be upper most. The baffle is raised into the roof area of the stove welded pin first. The rear of the baffle allowed to rest on the lugs, and the pin rests on the front lip of the stove where the body meets the canopy of the stove.